

DD700 DESICCANT DEHUMIDIFIER

SPECIFICATIONS

SPECIFICATIONS	10550GR-US	10551GR-US	FEATURES	DD700
Height (inch)	40	40	On/Off Control	✓
Width (inch)	28	28	Adjustable Thermostat	✓
Depth (inch)	23	23	Electronic Controls	✓
Weight (lbs)	170	170	Manual / Automatic Mode Selection	✓
Voltage (V)	220	460	Remote Humidity Sensor Facility	✓
Current (A)	16	8	Hours Run Meter	✓
Phase	3	3	EC High Efficiency Fans	✓
Frequency (Hz)	60	60	Variable Fan Speeds	✓
Power (kW)	6.2	6.2	High Capacity PTC Heaters	✓
Process Airflow Maximum – Dry Air (cfm)	883	883	Process / Regen Air Filter	✓
Process Airflow Nominal – Dry Air (cfm)	410	410	Rubber Anti-Vibration Feet	✓
Regen Airflow Nominal – Wet Air (cfm)	95	95	Dual Air Inlet Design	✓
Process Air Outlet Dia (inch)	8	8	Free Standing	✓
Regen Air Outlet Dia (inch)	6	6	Status Indicators	✓
Rotor Wheel Speed (rph)	13.6	13.6	Self Contained	✓
Rotor Size dia X depth (inch)	13.8 X 3.9	13.8 X 3.9	Stainless Steel Construction	○
High Extraction Setting @ 27°C 60% (ppd)	231	231	Inlet Duct Attachments	○
High Efficiency Setting @ 27°C 60% (ppd)	184	184	High Temperature Safety Cut-outs	✓
Deep Drying Settings @ 27°C 60% (ppd)	205	205		
Typical Dry Air Off – High Extraction Setting (%)	18	18		
Typical Dry Air Off – High Efficiency Setting (%)	18	18		
Typical Dry Air Off – Deep Drying Settings (%)	8	8		
Min Operating Temperature (°F)	-4	-4		
Max Operating Temperature (°F)	104	104		

APPLICATION

Dehumidifiers are required wherever there is a need to lower the humidity level to prevent corrosion, mold growth and condensation or maintain a low humidity condition during manufacture, packaging or storing of hygroscopic products.

METHODS OF DEHUMIDIFICATION

Dehumidification is possible using two possible principles, Condensation with refrigeration style dehumidifiers and Adsorption with desiccant dehumidifiers. Desiccant dehumidifiers perform exceptionally well when used in cooler climates, or when a low dew-point, deep drying or low humidity levels are required. Since desiccant dehumidifiers do not produce water, they will work effectively down to sub zero temperatures.

Their operation is simplistic yet extremely effective and reliable. Air (Process Air) is drawn into the dehumidifier, where it passes over a wheel impregnated with Silica Gel. As the air passes over this wheel, any moisture present in the air is absorbed into the Silica Gel wheel before leaving the dehumidifier as warm dry air.

The Silica Gel wheel is continually, slowly rotating, typically at three revolutions per hour. As the wheel rotates, a small portion passes through the regeneration segment. During this phase a second air stream (Regeneration Air) is heated to a high temperature before passing over the wheel. Any moisture present in the wheel is released into this air stream; this hot wet air is then exhausted outside the area being dried.

KEY DESIGN FEATURES

- EC High Efficiency Forward Curve Fans
- Infinitely Variable Fan Speed



PHARMACEUTICAL, CONFECTIONARY, DEFENSE INDUSTRY,
WATER DAMAGE, COLD STORES, POWER STATIONS, PLASTICS

HOW A DEHUMIDIFIER WORKS

Process air is drawn into the dehumidifier.

Process air passes over a wheel impregnated with silica gel.

The silica gel absorbs the moisture from the air.


Process air leaves the dehumidifier as warm dry air.

The silica gel wheel continually rotates.

Regeneration air is heated to a high temperature and passed over a segment of the wheel.

Silica gel releases the moisture from the wheel into the regeneration air.

Regeneration air leaves the dehumidifier as warm wet air and exhausted outside.

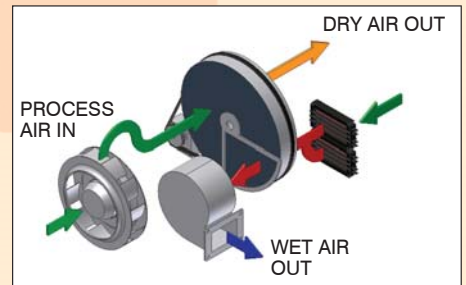

Applications	DD700
Offices	✓
Shops	✓
Restaurants	✓
Warehouses	✓
Basements	✓
Factories	✓
De-Flooding	✓
Pharmaceutical	✓
Defense Industry	✓
Confectionary	✓

Applications	DD700
Laboratories	✓
Medical	✓
Food Industry	✓
Agriculture	✓
Cold Stores	✓
Hospitals	✓
Hotels	✓
Stadiums	✓
Ships	✓

WHY CHOOSE EIPL

EIPL is Europe's leading manufacturer of dehumidifiers and is a name you can rely on. No matter how extreme the conditions EIPL's efficiency copes comfortably even at the coldest temperatures.

RUGGED CONSTRUCTION & YEARS OF SERVICE

Over thirty seven years of development experience means you can rely on the proven track record of the EIP range of dehumidifiers. Every dehumidifier is designed for efficiency and ruggedness, and built to last. The popularity of EIP Ltd's dehumidifiers with the plant hire trade speaks for their reliability, portability and outstanding durability.

DD700

The DD700 is the largest desiccant dehumidifier within the EIPL range. The unit incorporates a high capacity resistive heater ensuring maximum drying is immediately reached and constantly maintained while the unit is running. The DD700 incorporates two EC fans with variable speed allowing the unit to be easily installed, and commissioned in a wide variety of installations.

An electronic thermostat allows the user to select the desired drying level ie, high efficiency drying, deep drying, or high extraction, the following table provides an example of capacities.

80°F 60% - Example Settings			
	High Extraction	High Efficiency	Deep Drying
Process Airflow (cfm)	530	412	294
Regen Airflow (cfm)	118	94	118
Regen Temperature Rise (K)	110	90	110
Extraction (ppd)	231	184	205
Dry Air Off (%)	18	18	8



Facility for an external humidistat allows remote control of the drying cycle All models incorporate a high efficiency patented PPS Rotor. This design incorporates an 82% active Silica Gel to ensure optimum performance over the equipments wide operating range of environments. All desiccant rotors supplied by EIPL

Ebac Industrial Products Incorporated, 700 Thimble Shoals Blvd.
Suite 109, Newport News, VA 23606-2575

Tel: (757) 873-6800 Fax: (757) 873-3632 www.ebacusa.com

